

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 February 2004 (05.02.2004)


PCT

(10) International Publication Number
WO 2004/011743 A1

- (51) International Patent Classification⁷: **E04H 4/16**
- (21) International Application Number:
PCT/CZ2003/000035
- (22) International Filing Date: 25 June 2003 (25.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PUV 2002-13339 25 July 2002 (25.07.2002) CZ
- (71) Applicant (for all designated States except US): **STERBA, Miroslav** [CZ/CZ]; Taussigova 1172, 182 00 Praha 8 (CZ).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **NAVRATIL, Oldrich** [CZ/CZ]; Babylon c. 48, 345 06 Domazlice (CZ).
- (74) Agents: **ANDERA, Jiri** et al.; Rott, Ruzicka & Guttman, P.O. Box 94, 170 00 Praha 7 (CZ).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NL, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SI, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: **VACUUM CLEANER FOR RESERVOIRS**

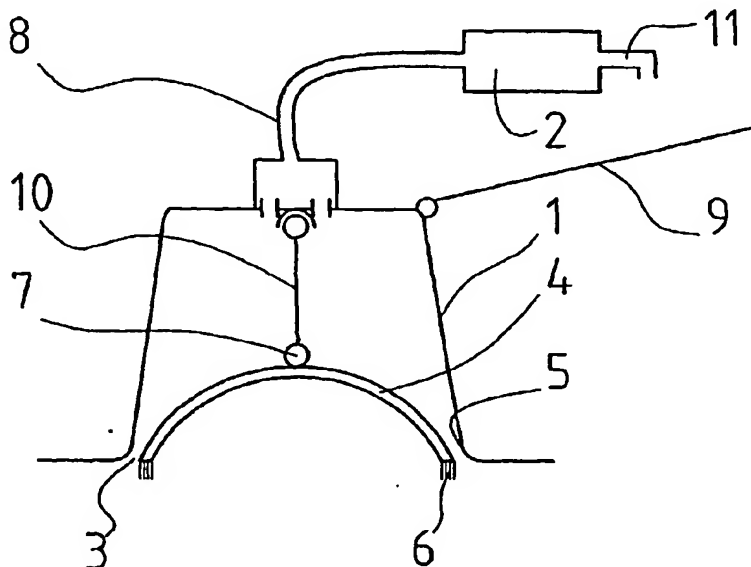

(57) **Abstract:** A vacuum cleaner for reservoirs, especially swimming pools, comprising a working chamber (1) provided with an inlet (3) for liquid, connected with a vacuum generating unit (2). Between the inlet (3) of liquid and the vacuum generating unit (2) there is a rotary-shaped rolling rotor (4) placed in the flow of drawn-in liquid. The rolling rotor (4) being arranged in swivelling and rotary manner and encompassed with a surface (5) for rolling. In the contact point between the rolling rotor (4) and the surface (5) for rolling the rolling rotor (4) has smaller diameter than the surface (5) for rolling. The rotor (4) is connected with at least one brush (6).

WO 2004/011743 A1